


179.00 EUR
 incl. 19% VAT, plus [shipping](#)

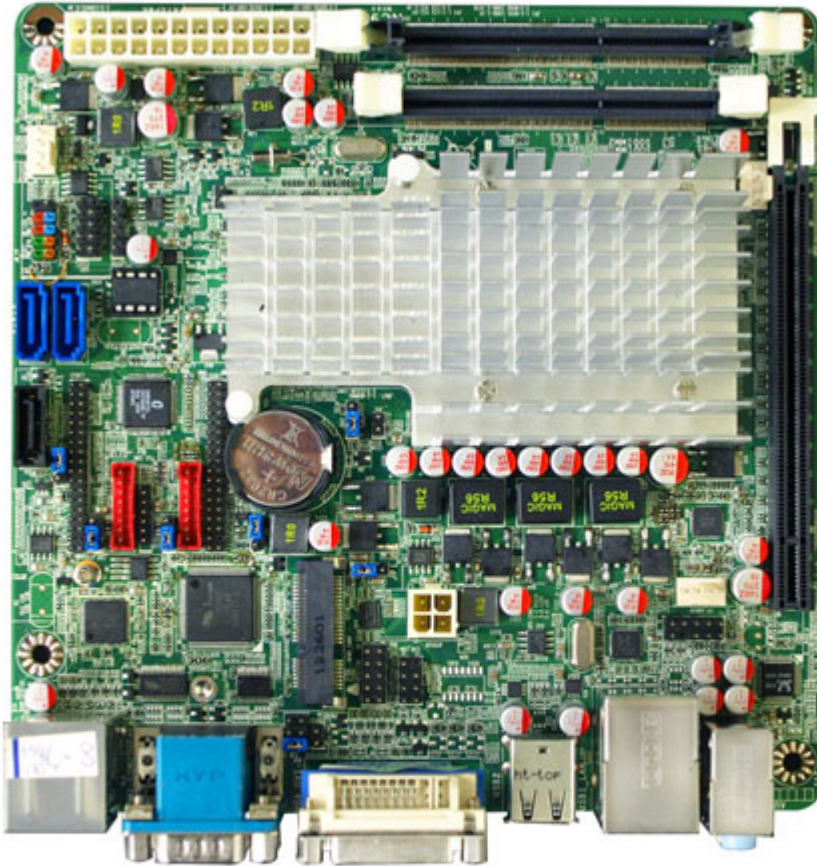

- INTEL® Celeron 847 Processor + NM70 Chipset
- Support 2 * DDR3 1066/1333MHz Dual-channel up to 16GB
- Support DirectX 10.1, DirectX10, DirectX9 Graphics
- Support 2 * Serial ATAII (3Gb/s) & 1 * Serial ATAIII (6Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- 2 * 24 bits Dual Channel LVDS header
- Supports 1 * Realtek RT8111F Gigabit LAN
- Support 2 * COM ports (COM1 for RS232/422/485)
- Support Windows 8
- Support Watch dog Technology
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

• CPU	• INTEL® Celeron 847 Dual Core Processor (1.1GHz)
• Chipset	• INTEL®NM70 Express chipset
• Memory	• 2 * DDR3 1066/1333MHz Dual-channel SO-DIMM up to 16GB
• Expansion Slots	• 1 * PCI -E x 16 slot • 1 * Mini PCI-E socket

• Storage	<ul style="list-style-type: none"> • 2 * Serial ATA2 3Gb/s & 1 * Serial ATA3 6Gb/s connectors • 1 * mSATA (Share with Mini PCI-E slot)
• Audio	<ul style="list-style-type: none"> • Realtek ALC662 6-Channel HD Audio
• Ethernet LAN	<ul style="list-style-type: none"> • 1 * RTL8111F PCI-E Gigabit LAN
• LVDS	<ul style="list-style-type: none"> • Onboard 2 * 24-bits Dual channel connector
• USB	<ul style="list-style-type: none"> • Embedded 2 * USB 3.0 & 7 * USB 2.0/1.1
• Special Features	<ul style="list-style-type: none"> • Support ACPI S3 • Support CPU Smart FAN • Support Watch Dog
• Rear Panel I/O	<ul style="list-style-type: none"> • 2 * USB 3.0 • 4 * USB 2.0/1.1 ports • 1 * RJ-45 port • 3 * Audio I/O ports (Line-in, MIC and Line-out) • 1 * VGA port • 1 * DVI-D port • 1 * HDMI port • 2 * COM ports (COM1 for RS232/422/485)
• Internal I/O	<ul style="list-style-type: none"> • 2 * USB 2.0/1.1 headers for 3 USB 2.0 ports • 1 * PS/2 Mouse & 1 * Keyboard header • 2 * NB / Chassis Fan connectors; • 2 * LVDS headers / 2 * Inverter headers • 1 * AUDIO header
• BIOS	<ul style="list-style-type: none"> • AMI 32MB UEFI DIP Flash ROM
• Functional	<ul style="list-style-type: none"> • ATM, Automation, Medical Equipment, Kiosk, Networking, POS, General Application, Transportation
• Packing	<ul style="list-style-type: none"> • Color Box Dimension ■200(W) x 200(D) x 70(H)mm
• Certificate	<ul style="list-style-type: none"> • CE, FCC, RoHS
• Temperature	<ul style="list-style-type: none"> • Operating within 0~40 centigrade (Suggest to use system FAN) • Storage within -20-85 centigrade
• Form Factor	<ul style="list-style-type: none"> • Mini ITX Form Factor(17cmx17cm)