


219.00 EUR
 incl. 19% VAT, plus [shipping](#)

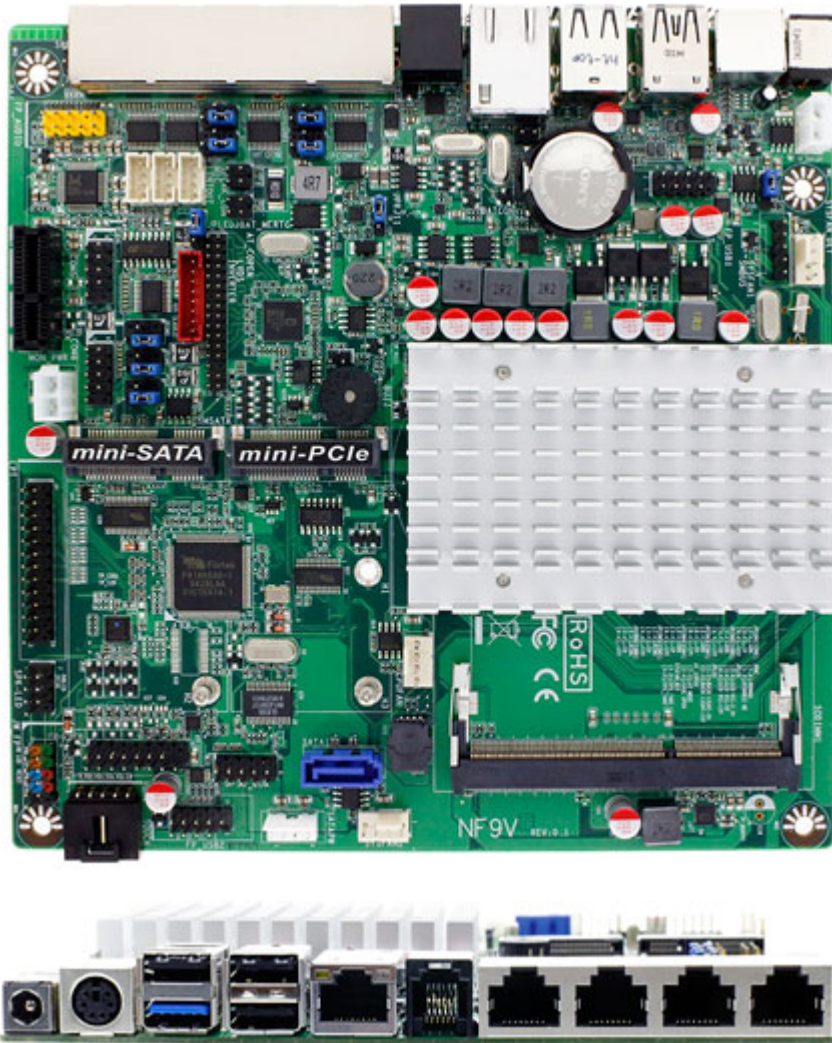

- Intel® Baytrail-M N2930
- 1 * DDR3L 1333 up to 8GB
- 1 * Serial ATAII (3Gb/s) Devices
- I2C support
- Touch panel I/F support
- 4 * RJ45 for Series(Console) port, 1 * RJ11
- 1 * Realtek Gigabit LAN, 1 * PS2
- PCIe x1 * 1, mPCIe * 1, mSATA * 1
- Support CPU Over-Temperature protection
- Support CPU Over-Current/Under Voltage protection
- Support DRAM Over-Current/Under Voltage protection
- Support CPU Smart Fan
- Support DC Fan
- Mini-ITX form factor (170mm x 170mm)

| | |
|-------------------------|--|
| Form Factor | |
| Dimensions | Thin Mini-ITX (6.7-in x 6.7-in, 170 x 170mm) |
| Processor System | |
| CPU | Intel® Baytrail-M/D/I Processor Supports Hyper-Threading Technology |
| Core Number | (By CPU) |
| Max Speed | (By CPU) |
| L2 Cache | (By CPU) |

| | |
|---------------------------|---|
| Chipset | - N/A |
| BIOS | - AMI 64Mb Flash ROM |
| Expansion Slot | |
| PCI | - 0 |
| Mini-PCIe | - 1 |
| mSATA | - 1 |
| PCIe | - 1 (x1) |
| CFast Card Socket | - 0 |
| CF Card Socket | - 0 |
| Memory | |
| Technology | - Dual/Single Channel DDR3 1333/1066 MHz SDRAM (By CPU) |
| Max. | - 8GB |
| Socket | - 1 x SO-DIMM |
| Graphics | |
| Controller | - Intel® Gen7 Intel® Graphics DX 11, OGL3.2 |
| VRAM | - Shared Memory |
| VGA | - 1 (Internal) |
| LVDS | - Dual Channel 24-bit, max resolution 1920x1200@60Hz |
| HDMI | - No |
| DVI-I | - No |
| DisplayPort | - No |
| MultiDisplay | - Yes (Dual Display) |
| Ethernet | |
| Ethernet | - 10/100/1000 Mbps |
| Controller | - GbE LAN: Realtek RTL8111G |
| Connector | - 1 x RJ 45 |
| SATA | |
| Max Data Transfer Rate | - 1 x SATAII (3.0Gb/s) |
| Real I/O | |
| VGA | - 0 |
| DVI-I | - 0 |
| HDMI | - 0 |
| DisplayPort | - 0 |
| Ethernet | - 1 |
| USB | - 4 (1 x USB 3.0, 3 x USB 2.0) |
| Audio | - 0 |
| Serial | - 4 (4 x RJ45) |
| RJ11 | - 1 |
| eSATA | - 0 |
| PS2 | - 1 |
| DC-input | - 1 (DC-in JACK 12V) |
| Internal Connector | |
| USB | - 4 (4 x USB 2.0 via 10pin header) |
| PS2 | - 0 |
| LVDS / inverter | - 1/1 |
| VGA | - 1 |
| Serial | - 2 (2 x RS-232 with 5V/12V selectable header, 1 x support RS232/422/485) |
| SATA | - 1 x SATAII (3.0Gb/s) |
| mPCIe | - 1 |
| Parallel | - 1 |
| mSATA | - 1 |
| CIR | - 0 |
| GPIO 8-bit | - 4in / 4 out |
| Chassis intrusion | - 1 (via 12pin header) |

| | |
|---------------------------|--|
| Audio Header | - 1 x FP_AUDIO ,1 x 2ch Line Out ,1 x MIC ,1 x 2ch audio w/3W Amp |
| SMBUS(I2C) | - 1 |
| Watchdog Timer | |
| Output | - From Super I/O to drag RESETCON# |
| Interval | - 256 segments, 0,1,2...255sec/min |
| Power Requirements | |
| Input PWR | - 12V DC-In JACK |
| Power On | AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready |
| Certifications | |
| Certifications | - CE, FCC, RoHS, REACH |
| Environment | |
| Temperature | - Operating: 0■– 60■ - Storage: -20■– 85■ |