


298.00 EUR
 incl. 19% VAT, plus [shipping](#)

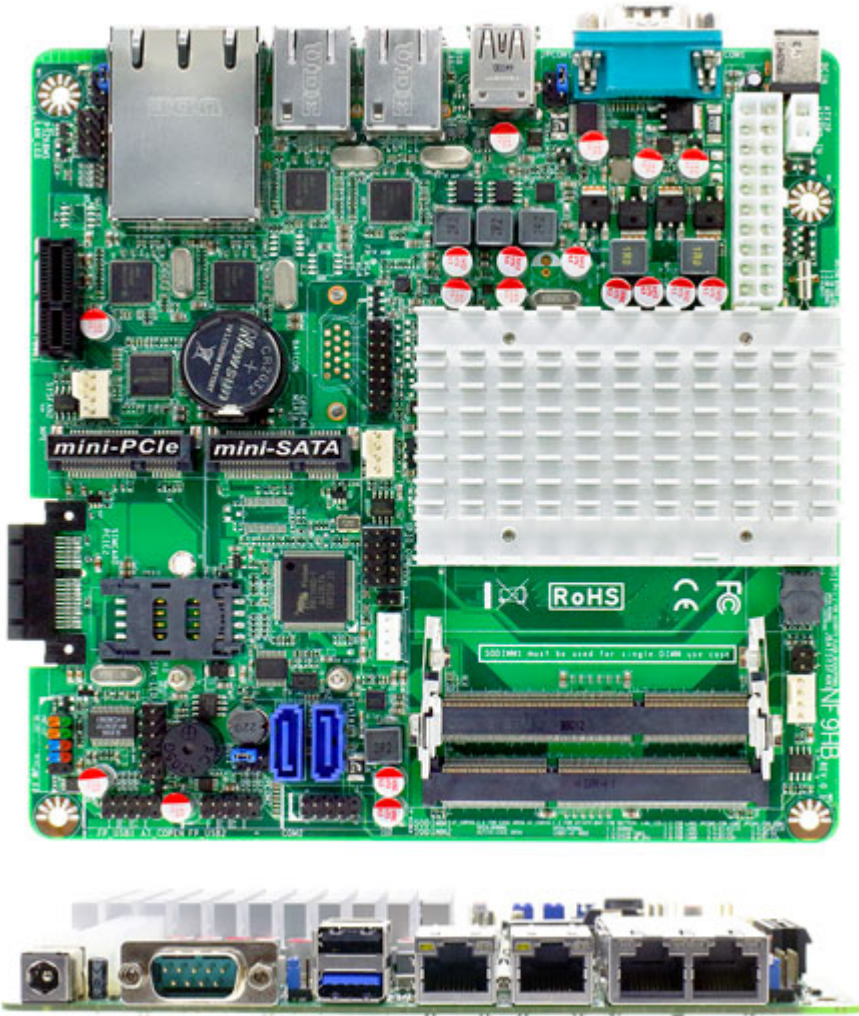

- Intel® Baytrail-M/D/I Processor
- Integrated Intel® Gen7 Intel® Graphics DX 11*, OGL3.0
- Supports Single Channel DDR3L 1333 MHz, 2 x SO-DIMM, up to 8GB system memory
- Gigabit LAN : 4 x Intel LAN
- TPM by option
- 3G module with SIM card slot
- 1 x internal VGA port
- 1 x USB 3.0, 1 x USB 2.0
- 1 x mini-PCIe, 1 x mSATA, 2 x PClex1
- 3G module with SIM card slot
- Support CPU Over-Temperature protection
- Support CPU Over-Current/Under Voltage protection
- Support DRAM Over-Current/Under Voltage protection
- Support CPU Smart Fan

| | |
|-------------------------|--|
| Form Factor | |
| Dimensions | Mini-ITX (6.7-in x 6.7-in, 170 x 170mm) |
| Processor System | |
| CPU | Intel® Baytrail-M Celeron N2930 Processor - Supports Hyper-Threading Technology |
| Core Number | (By CPU) |
| Max Speed | (By CPU) |
| L2 Cache | (By CPU) |

| | |
|---------------------------|--|
| Chipset | - N/A |
| BIOS | - AMI 64Mb Flash ROM |
| Expansion Slot | |
| Mini-PCIe | - 1 (full size) |
| mSATA | - 1 share with SATA2 (full size) |
| PCIe | - 2 (x1) |
| SIM | - 1 |
| Memory | |
| Technology | - Single Channel DDR3L 1333 MHz SDRAM (By CPU) |
| Max. | - 8GB |
| Socket | - 2 x SO-DIMM |
| Graphics | |
| Controller | - Intel® Gen7 Intel® Graphics DX 11*, OGL3.0 |
| VRAM | - Shared Memory |
| VGA | - 1 (Internal) |
| LVDS | - 0 |
| HDMI | - 0 |
| MultiDisplay | - No |
| Ethernet | |
| Ethernet | - 10/100/1000 Mbps |
| Controller | - GbE LAN: Intel I211AT |
| Connector | - 4 x RJ 45 |
| SATA | |
| Max Data Transfer Rate | - 2 x SATAII (3.0Gb/s) (1 share with mSATA) |
| Rear I/O | |
| VGA | - 0 |
| HDMI | - 0 |
| Ethernet | - 4 |
| USB | - 2 (1 x USB 3.0, 1 x USB 2.0) |
| Audio | - 0 |
| Serial | - 1 x RS-232 |
| PS2 | - 0 |
| DC-input | - 1 x 12V DC-in JACK |
| Internal Connector | |
| USB | - 4 (4 x USB 2.0) |
| LVDS / inverter | - 0 |
| Serial | - 2 (2 x RS-232 with 5V/12V selectable header) |
| SATA | - 2 |
| mPCIe | - 1 |
| mSATA | - 1 |
| Chassis intrusion | - 1 (via 12pin header) |
| PS2 | - 1 |
| Audio Header | - 0 |
| Watchdog Timer | |
| Output | - From Super I/O to drag RESETCON# |
| Interval | - 256 segments, 0,1,2...255sec/min |
| Power Requirements | |
| Input PWR | - 12V DC-In (2-pin PWR Con) |
| Power On | - AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready |
| Certifications | |
| Certifications | - CE, FCC, RoHS, REACH |
| Environment | |

| | |
|-------------|-----------------------|
| Temperature | Operating: 0 ■ – 60 ■ |
| | Storage: -20 ■ – 85 ■ |